

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 E-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM20 2DY, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 E-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6733 Myers Road
 East Syracuse, NY 13057, USA
 Phone: 315-437-5866
 1-800-554-5866
 Fax: 315-437-5860
 E-mail: info.us@jumo.net
 Internet: www.jumousa.com



JUMO exTHERM-AT

Type 605055, Explosion-proof surface-mounted thermostat for zones 1, 2, 21, and 22

Special features

- Single thermostat and double thermostat with capillary or rigid thermowell
- Switching capacity up to 25 A
- Admissible ambient temperatures -55 °C to +70 °C
- Thermowell for use in zone 0 available as an accessory
- Quick and safer electrical connection through Push-In® terminal technology
- Stable switching points through standard ambient temperature compensation



JUMO exTHERM-AT double thermostat



JUMO exTHERM-AT single thermostat

Brief description

The explosion-proof surface-mounted thermostats of the JUMO exTHERM series are built to monitor and control temperatures in potentially explosive areas. The use in environments with gas and steam is permitted (zones 1 and 2); use in environments with conductive dust (zones 21 and 22) is also permitted.

The JUMO exTHERM-AT is available as temperature monitor TW, safety temperature monitor (STW), and safety temperature limiter (STB). The thermostats work according to the liquid expansion or gas expansion principle. The electrical switching element is a pressure-resistant encapsulated thermostat with a snap-action switch. Stable switching points when ambient temperatures fluctuate are made possible by the standard ambient temperature compensation.

The thermostats of the JUMO exTHERM-AT series are RoHS conform and cadmium free.

Version according to DIN EN 14597:

TW	Temperature monitor
STW	Safety temperature monitor
STB	Safety temperature limiter

ATEX identification

	II 2G Ex d e IIC T4/T5/T6 Gb For explosive gas atmosphere
	II 2D Ex tb IIIC T85 °C/T100 °C/T130 °C Db For explosive dust atmosphere

ATEX confirmation

EPS 11 ATEX 1 354

EAC-Ex confirmation

TC RU C-DE.ME92.B.00443

IECEx identification

	Ex d e IIC T4/T5/T6 Gb For explosive gas atmosphere
	Ex tb IIIC T85 °C/T100 °C/T130 °C Db For explosive dust atmosphere

IECEx confirmation

IECEx EPS 13.0046

SIL-confirmation

EPS 11 ATEX 1 354 (SIL 2)

Approvals/approval marks (see "Technical data")



* Available with extra code (TZ 240)

** Available with extra code (TZ 372)

*** Available with extra code (TZ 073)

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 E-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM20 2DY, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 E-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6733 Myers Road
 East Syracuse, NY 13057, USA
 Phone: 315-437-5866
 1-800-554-5866
 Fax: 315-437-5860
 E-mail: info.us@jumo.net
 Internet: www.jumousa.com



Technical data

Switching function

Temperature monitor TW and safety temperature monitor STW	Restart lock for the safety temperature limiter STB	Self-monitoring for the safety temperature monitor STW and safety temperature limiter STB
If the temperature on the temperature probe exceeds the setpoint value, the microswitch is activated by the transmission mechanics and the electrical circuit is opened or closed. If the temperature falls below the selected set-point value (by the amount of the switching differential), the microswitch is reset to its initial position.	If the temperature on the temperature probe exceeds the set limit value, the electrical circuit is opened and the microswitch is mechanically locked. The microswitch can be manually unlocked once the dangerous temperature of the set-point value drops by approx. 20 % of the scale range.	If the measuring system is destroyed (i.e. if the expansion fluid escapes) the pressure in the membrane of the STB and STW drops and permanently opens the electrical circuit. Unlocking is then no longer possible. The electrical circuit opens when cooling the probe of STW (STB) and STB down to the negative temperature range, but it then closes again if the temperature rises. The STB must be unlocked manually if the minimum probe temperature is exceeded. The STW unlocks itself automatically.

Temperature compensation

	When the ambient temperature on the switching head and the capillary deviates – from the calibration ambient temperature of +22 °C – a switching point offset occurs. This switching point offset is reduced to a minimum due to the temperature compensation.
--	--

Case

Material	Polyester case, glass fiber reinforced, black (option: stainless steel)
Protection type	EN 60529 - IP65 (polyester case), pollution level 2, IP 66 with extra code 861
Setpoint value adjustment	With screwdriver (once the case lid has been removed)
Switching head fastening	Using four screws (once the case lid has been removed)
Weight	Approx. 1200 g single thermostat / approx. 2000 g double thermostat
Cable inlet	Ex cable gland M20 x 1.5, sealing area 6 to 13 mm and Ex cable gland M25 x 1.5, sealing area 7 to 17 mm

Process connection

JUMO exTHERM-AT with capillary	Plain cylindrical probe (standard), rigid thermowell, spiral probe for room thermostat version
--------------------------------	--

Accessories

JUMO exTHERM-AT	Multi-section standard thermowells made out of CrNi for use in zones 1, 2, 21, 22 (see data sheet 606710) Multi-section thermowells made out of CrNi for use in zone separation 0/1, 20/21 (see new data sheet 605057)
-----------------	---

Operating data

Medium ambient temperature influence	When the ambient temperature on the switching head and/or the capillary deviates from the calibration ambient temperature of +22 °C, a switching point offset occurs. Higher ambient temperature = lower switching point Lower ambient temperature = higher switching point
Admissible storage temperature / admissible ambient temperature when in use	-40 °C, optionally -55 °C to +70 °C (referring to T4)
Max. probe temperature	+15 % of the limit value / max. adjustment value or 25 K
Rated position (NL)	According to DIN 16257, NL 0 to NL 90

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 E-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM20 2DY, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 E-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6733 Myers Road
 East Syracuse, NY 13057, USA
 Phone: 315-437-5866
 1-800-554-5866
 Fax: 315-437-5860
 E-mail: info.us@jumo.net
 Internet: www.jumousa.com



Electrical data

Max. switching capacity	Selectable on the N/C contact (contact deck 1-2): AC 400 V +10 %, 16 A AC 230 V +10 %, 16 (2.5) A, cos φ = 1 (0.6)* AC 230 V +10 %, 25 (4) A, cos φ = 1 (0.6) DC 230 V +10 %, 0.25 A Selectable on the N/O contact (contact deck 1-4): TW, STW STB AC 400 V +10 %, 6.3 A AC 400 V +10 %, 2 A AC 230 V +10 %, 6.3 (2.5) A, cos φ = 1 (0.6)* AC 230 V +10 %, 2 (0.4) A, cos φ = 1 (0.6)* AC 230 V +10 %, 2 (0.4) A, cos φ = 1 (0.6) AC 230 V +10 %, 2 (0.4) A, cos φ = 1 (0.6) DC 230 V +10 %, 0.25 A AC 230 V +10 %, 0.25 A Snap-action switch, gold-plated AC / DC = 24 V, 0.1 A		
Min. switching capacity	To ensure the greatest possible switching reliability we recommend a minimum load of: AC / DC = 24 V, 100 mA for silver contacts AC / DC = 10 V, 5 mA for gold-plated contacts		

* standard

Capillary and temperature probe

Type	Capillary Ø 1.5 mm	Temperature probe
JUMO exTHERM-AT	Stainless steel (CrNi) 1.4571	Stainless steel (CrNi) 1.4571, welded
Capillary length		Max. 5000 mm
Capillary bending radius		≥ 5 mm

Control ranges and probe table

Control range In °C	Max. capillary length In mm	Probe length "L"			
		For "d" = 4 mm		For "d" = 6 mm	
		TW	STW, STB	TW	STW, STB
In °C	5000	Hysteresis			
		Approx. 2.5 %	Approx. 7 %	Approx. 2.5 %	Approx. 7 %
		--	--	138	81
		203	113	90	58
		154	87	72	48
		--	--	115	70
		135	78	65	--
		--	--	278	--
+140 to +500	--	--	--	--	126

Switching point tolerance in the middle section of the scale

Control range in °C	TW in K	STW upward adjustment in K	STW downward adjustment in K	STB in K
-20 to +40	+2/-2	--	--	--
-20 to +50	+3/-3	+0/-5	+5/-0	+0/-5
0 to +100	+5/-5	+0/-10	+10/-0	+0/-10
0 to +120	+5/-5	+0/-10	+10/-0	+0/-10
+130 to +190	+8/-8	+0/-16	+16/-0	+0/-16
0 to +200	+8/-8	+0/-16	+16/-0	+0/-16
+50 to +300	+12/-12	+0/-24	+24/-0	+0/-24
+20 to +500	+22/-22	--	--	--
+140 to +500	+22/-22	+0/-44	+44/-0	+0/-44

Temperature monitors (TW) and safety temperature monitors (STW) are adjusted ascendingly in the middle section of the scale as standard procedure. Safety temperature limiters (STB) are adjusted in the upper section of the scale. Special adjustments are possible upon request.

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 E-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM20 2DY, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 E-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6733 Myers Road
 East Syracuse, NY 13057, USA
 Phone: 315-437-5866
 1-800-554-5866
 Fax: 315-437-5860
 E-mail: info.us@jumo.net
 Internet: www.jumousa.com




Approvals/approval marks


JUMO exTHERM-AT	Switching function	Certificates/test confirmations	Tests	Standard
TW / STW / STB	TW / STW / STB	EPS 11 ATEX 1 354	ATEX	DIN EN 60079
		IECEx EPS 13.0046	IECEx TZ 372	IEC 60079
		TC RU C-DE.ME92.B.00443	EAC-Ex ^a TZ 240	TR RC 012/2011
	STW / STB	EPS 11 ATEX 1 354	SIL 2	DIN EN 50495

^a Russian documentation upon request

Wiring diagrams

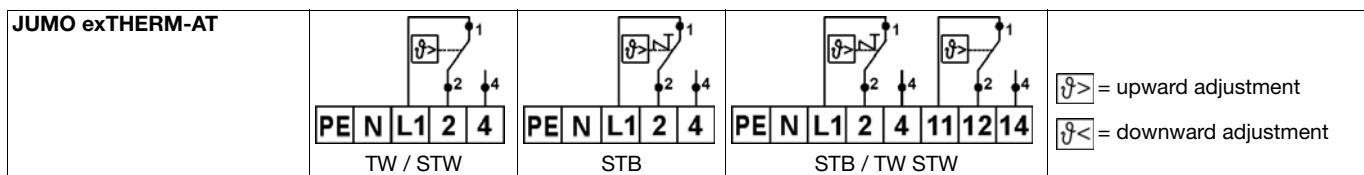

Dimensions

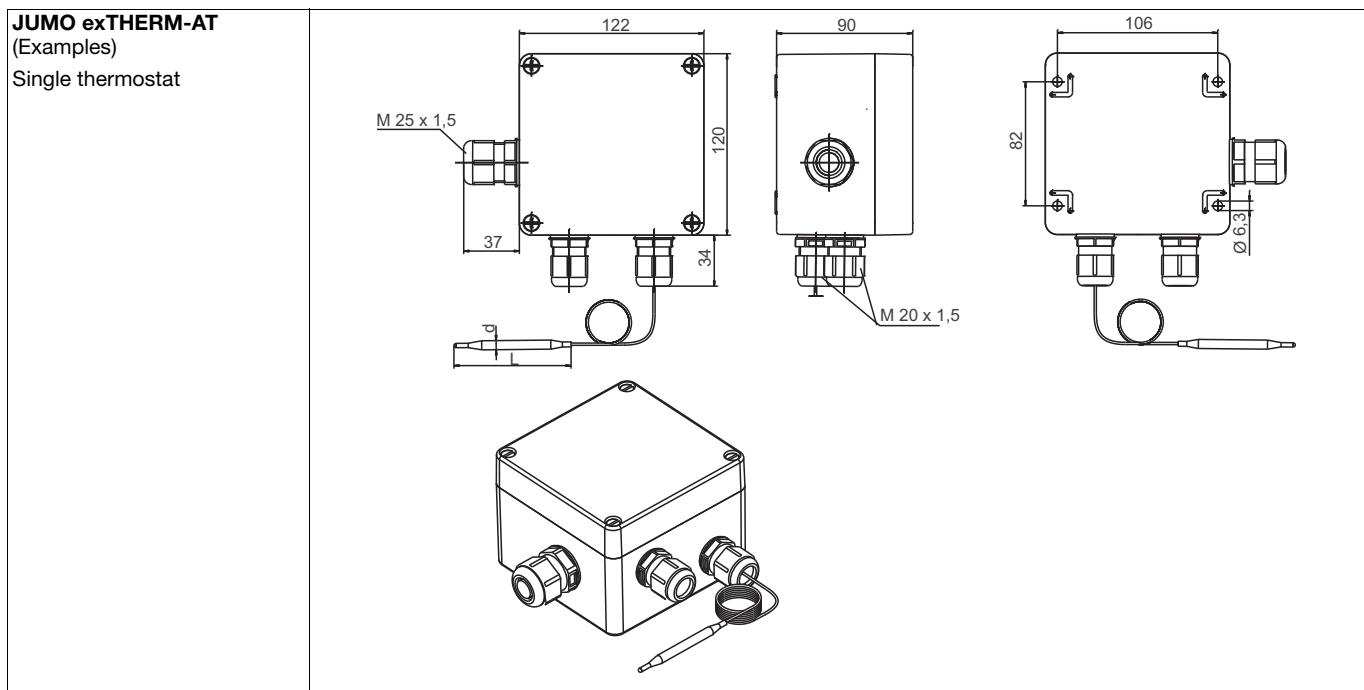

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 E-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM20 2DY, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 E-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6733 Myers Road
 East Syracuse, NY 13057, USA
 Phone: 315-437-5866
 1-800-554-5866
 Fax: 315-437-5860
 E-mail: info.us@jumo.net
 Internet: www.jumousa.com




Dimensions


JUMO exTHERM-AT

(Examples)

Double thermostat

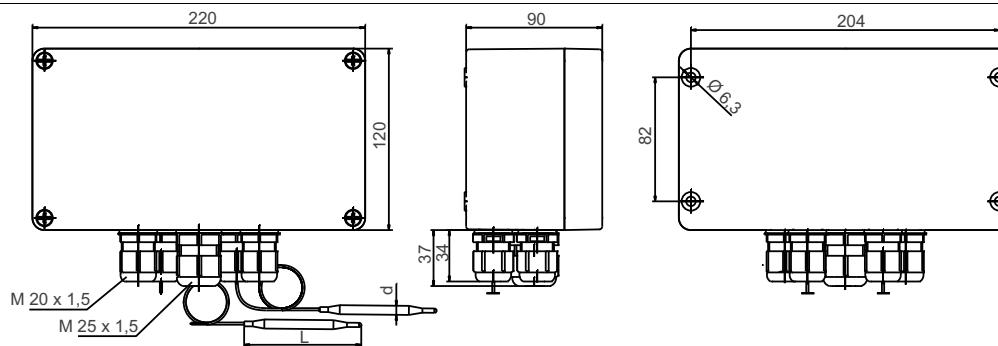

Room thermostat

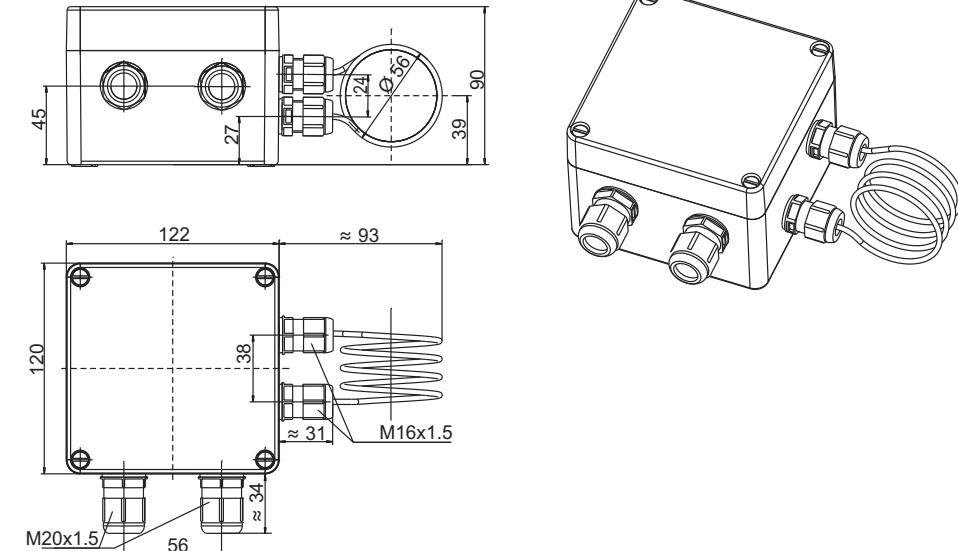

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 E-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM20 2DY, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 E-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6733 Myers Road
 East Syracuse, NY 13057, USA
 Phone: 315-437-5866
 1-800-554-5866
 Fax: 315-437-5860
 E-mail: info.us@jumo.net
 Internet: www.jumousa.com






Dimensions




JUMO exTHERM-AT (Examples)

Thermostat with rigid thermowell (process connection 74)

Thermowells can be ordered separately according to data sheet 605057 (with Ex-approval) or data sheet 606710 (standard)

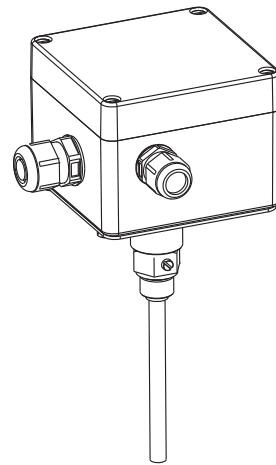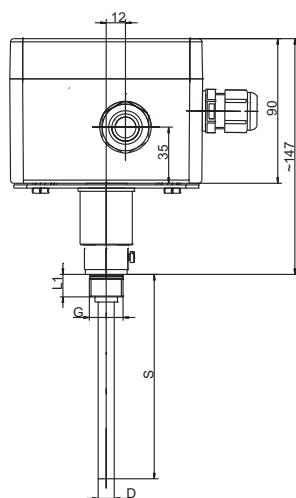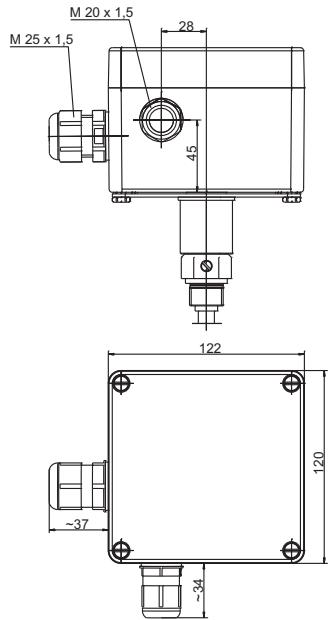

Thermostat with sleeve and heat sink, limit value > 150 °C

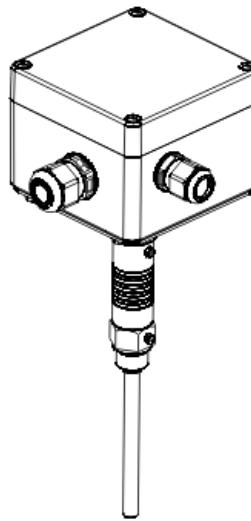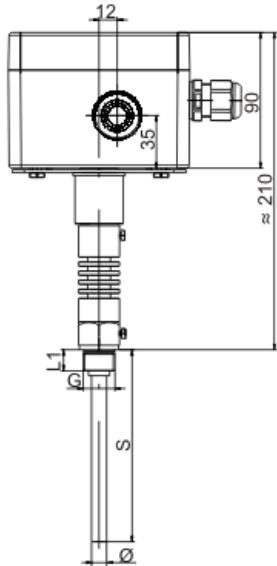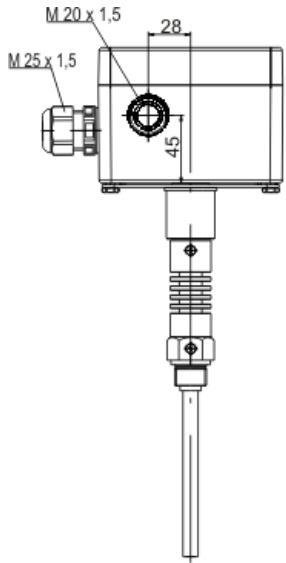

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 E-mail: mail@jumo.net
 Internet: www.jumo.net




JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM20 2DY, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 E-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6733 Myers Road
 East Syracuse, NY 13057, USA
 Phone: 315-437-5866
 1-800-554-5866
 Fax: 315-437-5860
 E-mail: info.us@jumo.net
 Internet: www.jumousa.com





Dimensions

JUMO exTHERM-AT
 (Examples)
 Double thermostat with sleeve (process connection 74)
 Thermowells can be ordered separately according to data sheet 605057 (with Ex approval) or data sheet 606710 (standard)

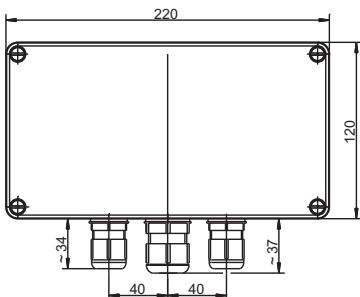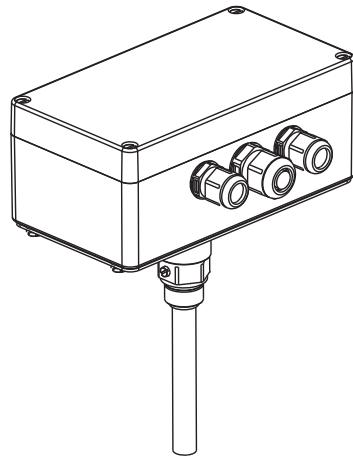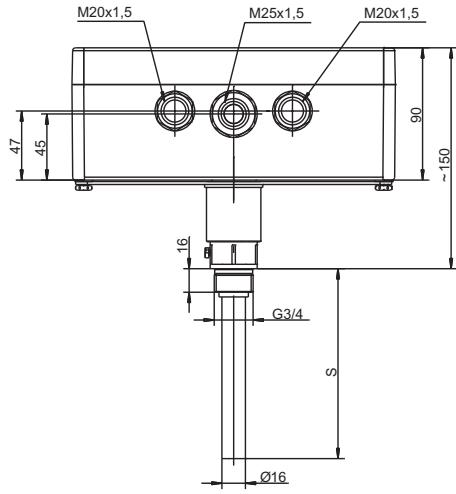

Double thermostat with sleeve and heat sink, limit value > 150 to 300 °C

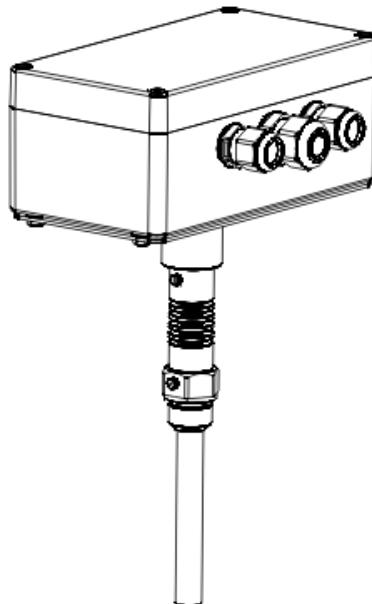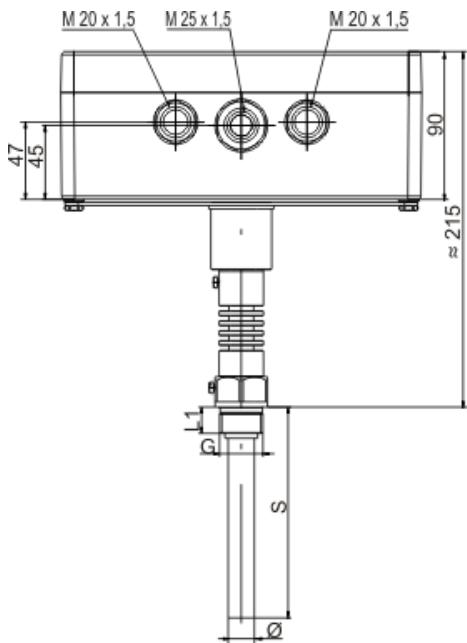

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 E-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM20 2DY, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 E-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6733 Myers Road
 East Syracuse, NY 13057, USA
 Phone: 315-437-5866
 1-800-554-5866
 Fax: 315-437-5860
 E-mail: info.us@jumo.net
 Internet: www.jumousa.com



Order details

Explosion-proof panel-mounted thermostat JUMO exTHERM-AT

Order code	(1) Basic type
605055	Surface-mounted thermostat JUMO exTHERM-AT for potentially explosive areas
	(2) Basic type extensions
0002	Temperature monitor (TW)
0020	Safety temperature monitor (STW)
0070	Safety temperature limiter (STB)
0270	Temperature monitor (TW) and safety temperature limiter (STB)
2070	Safety temperature monitor (STW) and safety temperature limiter (STB)
	(3) Design type
5	Surface-mounted thermostat
6	Room thermostat
	(4) Case
4	Polyester case black (standard)
6	Stainless steel case
	(5) Control ranges / limit value ranges 1 in °C
013	-20 to +40 (only room thermostat)
014	-20 to +50
026	0 to +120
028	0 to +200
046	+20 to +500 (only TW)
064	+50 to +300
539	+140 to +500 (only STW and STB)
532	+130 to +190
	(6) Control ranges / limit value ranges 2 in °C
000	(only single thermostat)
013	-20 to +40 (only room thermostat)
014	-20 to +50
026	0 to +120
028	0 to +200
046	+20 to +500 (only TW)
064	+50 to +300
539	+140 to +500 (only STW and STB)
532	+130 to +190
	(7) Switching capacity
11	AC / DC = 24 V, 100 mA (gold-plated snap-action switch)
21	AC 230 V +10 %, 16 (2.5) A, cos φ = 1 (0.6) (standard)
41	AC 400 V +10 %, 16 A
25	AC 230 V +10 %, 25 (4) A, cos φ = 1 (0.6)
	(8) Operating temperatures in °C
340	-55 to +40 T6 (+70 °C T4) (+50 °C T4 at 25 A)
467	-40 to +40 T6 (standard) (+70 °C T4) (+50 °C T4 at 25 A)
	(9) Switching differential 1
00	Without switching differential (STB)
25	Approx. 2.5 % (TW)
70	Approx. 7 % (TW, STW)
	(10) Switching differential 2
00	Without switching differential (STB)
25	Approx. 2.5 % (TW)
70	Approx. 7 % (TW, STW)

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 E-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM20 2DY, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 E-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6733 Myers Road
 East Syracuse, NY 13057, USA
 Phone: 315-437-5866
 1-800-554-5866
 Fax: 315-437-5860
 E-mail: info.us@jumo.net
 Internet: www.jumousa.com



(11) Capillary length 1

- | | | |
|------|--|---------------------------------|
| 0 | 0 mm | design type 6, rigid thermowell |
| 1000 | 1000 mm | |
| 3000 | 3000 mm | |
| | (Special length, specifications in plain text, 1000 mm increments) | |

(12) Capillary length 2

- | | | |
|------|--|--|
| 0 | 0 mm | (only design type 6 and for single thermostat) |
| 1000 | 1000 mm | |
| 3000 | 3000 mm | |
| | (Special length, specifications in plain text, 1000 mm increments) | |

(13) Capillary material

- | | |
|----|------------------------|
| 20 | Stainless steel (CrNi) |
|----|------------------------|

(14) Process connection (PC)

- | | |
|----|--|
| 10 | Plain cylindrical probe |
| 15 | Spiral probe |
| 74 | Mounting adaptor (to 300 °C)
(thermowells can be ordered separately according to data sheet 605057
(with Ex-approval) or data sheet 606710 (standard)) |

(15) Diameter 1 "d" (single thermostat)

- | | |
|----|---------|
| 4 | Ø 4 mm |
| 6 | Ø 6 mm |
| 56 | Ø 56 mm |

(16) Diameter 2 "d" (double thermostat)

- | | |
|---|---------|
| 0 | Without |
| 4 | Ø 4 mm |
| 6 | Ø 6 mm |

(17) Insertion length "S"

- | | |
|-----|--------------------|
| 0 | Without thermowell |
| 200 | 200 mm |
| 300 | 300 mm |

(18) Extra codes

- | | | |
|-----|------------------------|--------------------|
| 000 | Without extra code | |
| 073 | SIL- and IPL-Approvals | (only STB and STW) |
| 240 | EAC-Ex-Approvals | |
| 372 | IECEx Approvals | |
| 861 | IP66 | |

Order code:

(1) 605055 / - . - . - . - . - . - . - . - . - . - . - . - . - . - . - . / , ...

Order example:

605055 / 2070 - 5 - 4 - 028 - 064 - 21 - 467 - 25 - 00 - 1000 - 1000 - 20 - 10 - 4 - 4 - 200 / 000 , ...

Stock versions

Order code	Control range °C	Probe CrNi / mm	Capillary CrNi / mm	Part no.
605055/0002-6-4-013-000-21-467-25-00-0-0-20-15-56-0-0/000	-20 bis +40	spiral probe	--	60003366
605055/0020-5-4-014-000-21-467-70-00-1000-0-20-10-6-0-0/000	-20 bis +50	6 x 81		60003365
605055/0020-5-4-026-000-21-467-70-00-1000-0-20-10-6-0-0/000	0 bis +120	6 x 58		60003367
605055/0020-5-4-064-000-21-467-70-00-1000-0-20-10-4-0-0/000	+50 bis +300	4 x 78		60003368
605055/2070-5-4-028-064-21-467-70-00-1000-1000-20-10-4-4-0/000	0 bis +200 (STW)	4 x 87 (STW)	1000	60003369
	+50 bis +300 (STB)	4 x 78 (STB)		
605055/0020-5-4-028-000-21-467-70-00-1000-0-20-10-6-0-0/000	0 bis +200	6 x 48		60003391
605055/0070-5-4-028-000-21-467-00-00-1000-0-20-10-6-0-0/000	0 bis +200	6 x 48		60003395
605055/0002-5-4-028-000-21-467-25-00-1000-0-20-10-6-0-0/000	0 bis +200	6 x 154		60003401